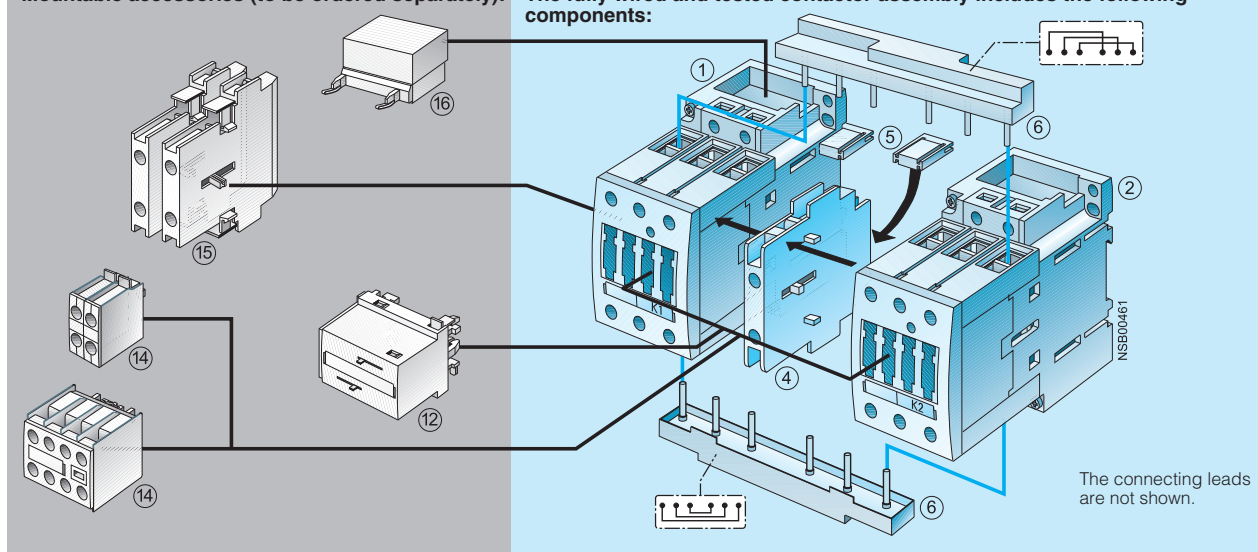



Selection and ordering data
Size S2 · up to 40 HP

AC-3 maximum inductive current	Maximum HP ratings of three-phase motors				Rated control supply voltage 1)	Fully wired and tested contactor assembly		Weight approx. kg
	200/208 V	230/240 V	460/480 V	575/600 V		Order No.	List Price \$	
A	HP	HP	HP	HP				
AC operation								
28	7.5	10	20	25	24 V, 50/60 Hz 120 V, 60 Hz 230 V, 60 Hz	3RA13 33-8XB30-1AC2 3RA13 33-8XB30-1AK6 3RA13 33-8XB30-1AP6		1.8
32	10	10	25	30	24 V, 50/60 Hz 120 V, 60 Hz 230 V, 60 Hz	3RA13 34-8XB30-1AC2 3RA13 34-8XB30-1AK6 3RA13 34-8XB30-1AP6		1.8
40	10	15	30	40	24 V, 50/60 Hz 120 V, 60 Hz 230 V, 60 Hz	3RA13 35-8XB30-1AC2 3RA13 35-8XB30-1AK6 3RA13 35-8XB30-1AP6		
50	15	15	40	50	24 V, 50/60 Hz 120 V, 60 Hz 230 V, 60 Hz	3RA13 36-8XB30-1AC2 3RA13 36-8XB30-1AK6 3RA13 36-8XB30-1AP6		
DC operation								
28	7.5	10	20	25	DC 24 V	3RA13 33-8XB30-1BB4		2.84
32	10	10	25	30	DC 24 V	3RA13 34-8XB30-1BB4		2.84
40	10	15	30	40	DC 24 V	3RA13 35-8XB30-1BB4		
50	15	15	40	50	DC 24 V	3RA13 36-8XB30-1BB4		

Mountable accessories (to be ordered separately):
The fully wired and tested contactor assembly includes the following components:


Accessory	Order No.	Page
⑫ Mechanical interlock, mountable on the front	3RA19 24-1A	2/47
⑭ Auxiliary switch block, mountable on the front	3RH19 21-1CA..	2/36
⑮ Auxiliary switch block, laterally mountable	3RH19 21-1EA..	2/37
⑯ Surge suppressor	3RT19 26-1.... 3RT19 36-1....	2/41

Components	Order No. K1	K2	Page
①② Contactors, 20 HP	3RT10 33	3RT10 33	2/8
①② Contactors, 25 HP	3RT10 34	3RT10 34	2/8
①② Contactors, 30 HP	3RT10 35	3RT10 35	2/8
①② Contactors, 40 HP	3RT10 36	3RT10 36	2/8
④ Mechanical interlock, laterally mountable	3RA19 24-2B		2/47
⑤⑥ Installation kit	3RA19 33-2A		2/48

The installation kit contains:


- ⑤ 2 connecting clips for 2 contactors with a clearance of 10 mm
- ⑥ Wiring connectors on the top and bottom for connecting the main conducting paths

For further voltages, see page 2/23.
For overview, see page 2/71-72.
For accessories, see page 2/47-49.
For circuit diagrams, see page 2/161.
For dimension drawings, see page 2/181.




Dimension drawings


Size S00

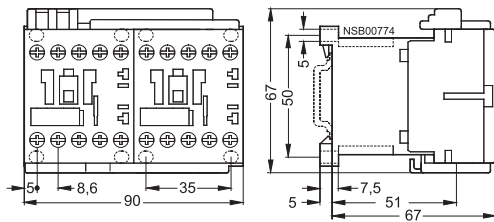


Size S0
With 3RA19 24-2B mechanical inter-
lock
laterally mountable

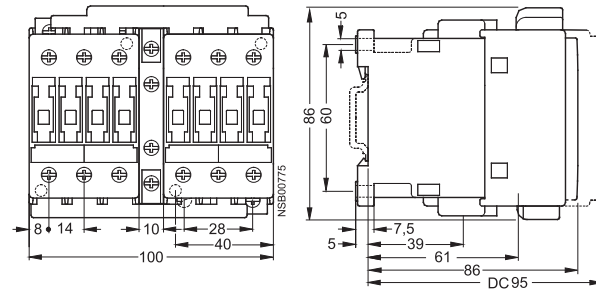

**With 3RA19 24-1A mechanical inter-
lock**
Mountable on front

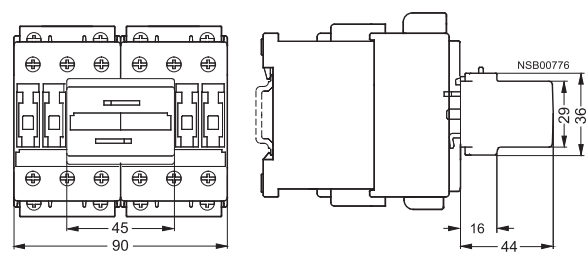

Size S2

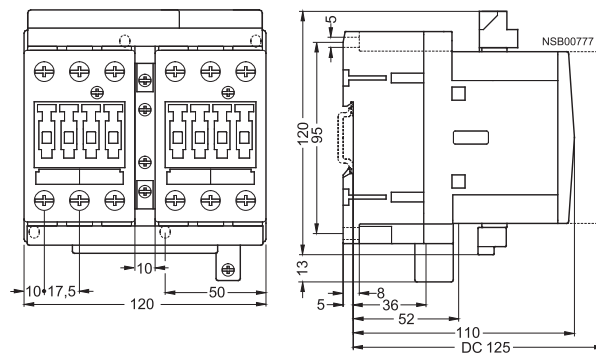

Size S3

