

MINI-CONTACTORS



DPBG12



DPBF09 T4
DPBF12 T4

CONTACTORS



DPBF09A
DPBF12A
DPBF18A



DPBF26A



DPBF26 T4



DPBF32A

Motor Full Load 600V	Locked Rotor			Resistive 600V	Maximum Horsepower						Incorporated auxiliary contacts		Type of termination	Catalog Number	Price
	240V	480V	600V		1 Phase		3 Phase								
					120V	240V	200V	240V	480V	600V					
[A]	[A]	[A]	[A]	[A]	[HP]	[HP]	[HP]	[HP]	[HP]	[HP]	NO	NC		\$ each	

THREE POWER POLES

14	84	84	84	20	$\frac{3}{4}$	2	3	3	10	10	0	1	Clamp-screw	DPBG12 01 A❶	76.00
											1	0		DPBG12 10 A❶	76.00
20	120	120	100	30	1½	3	5	5	10	10	0	1	Clamp-screw	DPBF09 01 A❶	81.00
											1	0		DPBF09 10 A❶	81.00
25	150	150	125	30	2	3	5	5	10	15	0	1	Clamp-screw	DPBF12 01 A❶	102.00
											1	0		DPBF12 10 A❶	102.00
30	180	180	150	32	2	5	7½	7½	15	20	0	1	Clamp-screw	DPBF18 01 A❶	117.00
											1	0		DPBF18 10 A❶	117.00
40	240	240	200	50	3	7½	10	10	30	30	0	0	Clamp-screw	DPBF26 00 A❶	150.00
50	300	300	250	55	3	10	15	15	30	40	0	0	Clamp-screw	DPBF32 00 A❶	154.00

FOUR POWER POLES ❷

14	84	84	84	20	$\frac{3}{4}$	2	3	3	10	10	0	0	Clamp-screw	DPBG12 T4 A❶	79.00
20	120	120	100	30	1½	3	5	5	10	10	0	0	Clamp-screw	DPBF09 T4 A❶	90.00
25	150	150	125	30	2	3	5	5	10	15	0	0	Clamp-screw	DPBF12 T4 A❶	111.00
30	180	180	150	32	2	5	7½	7½	15	20	0	0	Clamp-screw	DPBF18 T4 A❶	142.00
40	240	240	200	50	3	7½	10	10	30	30	0	0	Clamp-screw	DPBF26 T4 A❶	162.00

❶ Complete catalog number with coil code as follow:

Code	Voltage range
024 60	24VAC 60Hz
120 60	120VAC 60Hz
230 60	230VAC 60Hz
460 60	460VAC 60Hz
575 60	575VAC 60Hz


Complete starter can be assembled using overload relays indicated in Section 5.

❷ The DPBF32A 3-pole type can be retrofitted with fourth pole, catalog number BFX42. Refer to page 4-5.

Positively guided contacts
See page TC-26 for details.

Certifications and compliance
UL listed for USA and Canada, file E93602.
Compliant with standards: UL508.


Door coupling version GUS with GUSH and GUSS

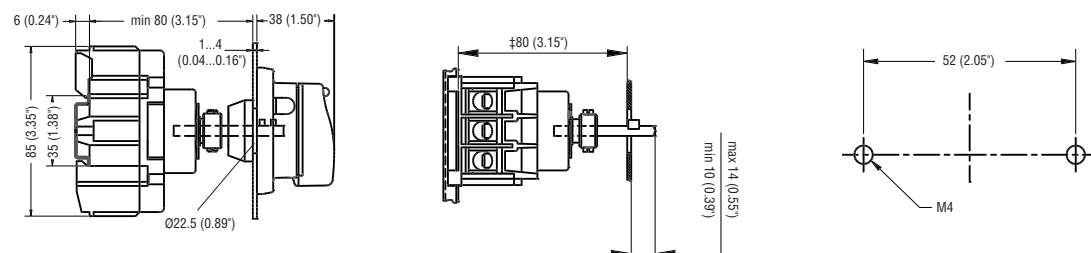


IEC style contactors DP definitive purpose contactors

THREE AND FOUR-POLE BG AND DPBG MINI-CONTACTORS AND CONTROL RELAY WITH AC OR DC COIL


BG mini-contactors or control relay
DPBG definite purpose contactor

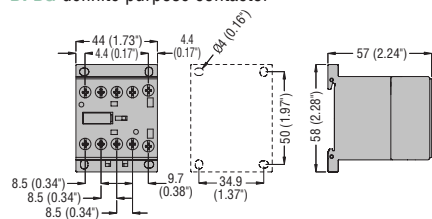


BG and **DPBG** mini-contactors
with screw terminals and RF...9 thermal relay

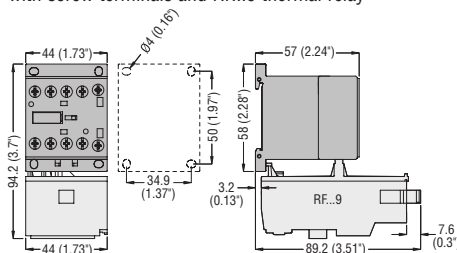


BGS with front PCB solder pins

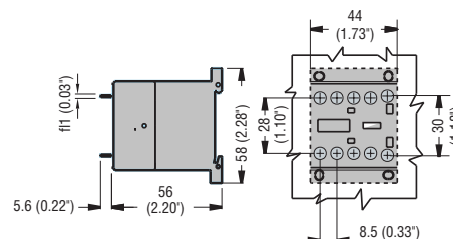

BGF
with rear PCB solder pins

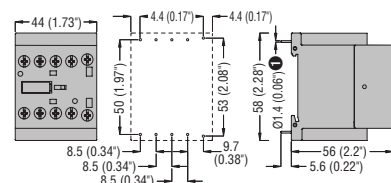


BGF
with Faston terminals

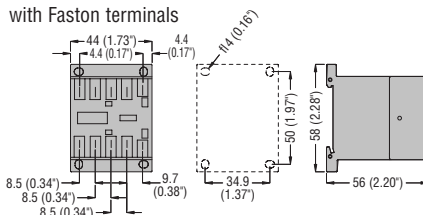


① Recommended PCB drillings 1.7-2mm (0.07-0.08in).

BF AND DPBF CONTACTORS WITH AC COIL


BF00A control relay - **DPBF09A** - **DPBF12A** - **DPBF18A** definite purpose and
BF09A - **BF12A** - **BF18A** - **BF25A** contactors four poles

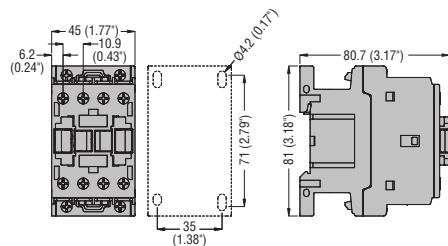


BF09A - **BF12A** - **BF18A** - **BF25A** - **DPBF09A** - **DPBF12A** - **DPBF18A** three poles
with RF...38 thermal relay

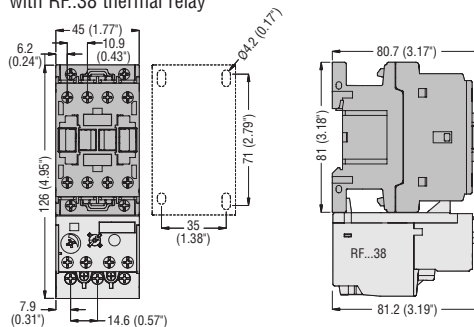

BF26A - **BF32A** - **BF38A** - **DPBF26A** - **DPBF32A** three poles
with RF...38 thermal relay

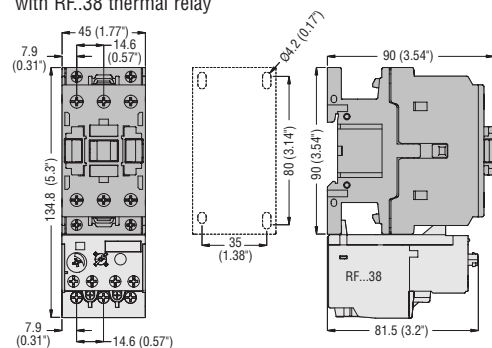

BF26 T - **BF32 T** ① - **BF38 T** - **DPBF26T** - **DPBF32T** ① four poles

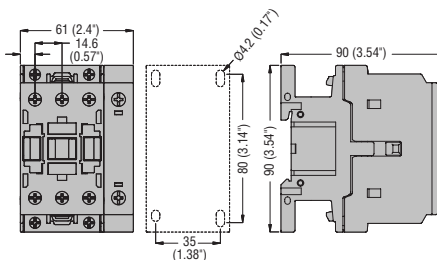

① DPBF32A fitted with fourth pole BFX42.